



SETU VP

Intelligent, Intuitive and Feature-Rich VoIP Phone

VoIP has emerged as an attractive telephony option. Both, at personal and organizational level, increasingly people are switching to VoIP to benefit from the advantages offered by this new technology. A powerful VoIP Phone is needed to empower its user to exploit the advantages to the fullest. An intelligent VoIP Phone thus becomes a vital link between the user and the IP network.

Introducing Matrix SETU VP An Intelligent, Intuitive and Feature-rich VoIP Phones!

Matrix SETU VP is based on the open standard SIP making it compatible with any VoIP infrastructure. It can work with any SIP Registrar/Proxy, IP-PBX or even in a stand-alone mode. Matrix SETU VP offers a host of intelligent intuitive features that save time and increase productivity.

Let Matrix SETU VP connect you to the new and exciting world of VoIP telephony!

Matrix SETU VP is a SIP based VoIP Phone with 2 Ethernet ports meant for LAN (Network) and PC. It can be used with any existing VoIP infrastructure. It works as an intelligent terminal of IP-PBX, SIP Registrar or Proxy. SETU VP can also be used in a stand-alone mode in point-to-point and point-to-multi-point applications.

Making an outgoing call is as easy as it is from a normal telephone. Call progress tones like Dial Tone, Ring Back Tone and Busy Tone are fed to the caller as per the called number status. The user can make outgoing calls on one of the two SIP accounts. In addition, number based automatic SIP account selection is provided to select the most economical SIP account for a given outgoing number.

An incoming call from a SIP account can land on SETU VP. Multiple calls can be received and managed simultaneously.

Once a call is established, features like Call Hold, Call Toggle, Call Transfer, Call Wait and Conference are supported to manage multiple calls. Call Forward in different conditions and Do Not Disturb are also provided.

SETU VP is specially designed for busy executives to offer intuitive user experience, saving valuable time and thus increasing productivity. Full-duplex Speaker Phone, Headset Interface, Programmable Keys, Auto Answer, Speed Dial and many such useful features are supported.

Matrix SETU VP is easy to install and operate. It can be configured using its built-in web pages served by the internal HTTP server. Auto Configuration is also supported for service providers or IP-PBX to control multiple phones from a centralized server.

MATRIX SETU VP PRODUCT RANGE

- SETU VP236S with 2 lines x 24 characters LCD Display
- SETU VP236SE with 2 lines x 24 characters LCD Display and PoE
- SETU VP248SE with 2 lines x 24 Characters LCD Display and PoE
- SETU VP248PE with 6 lines x 24 Characters LCD Display and PoE




SETU VP236




SETU VP248


APPLICATIONS OF SETU VP

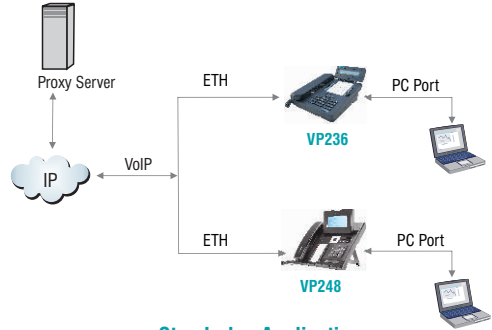

Stand-alone Application

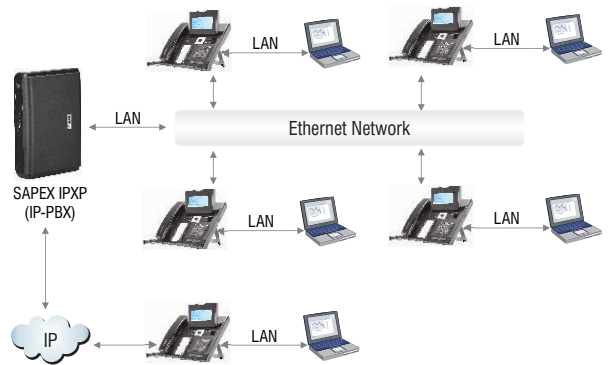

Business Application

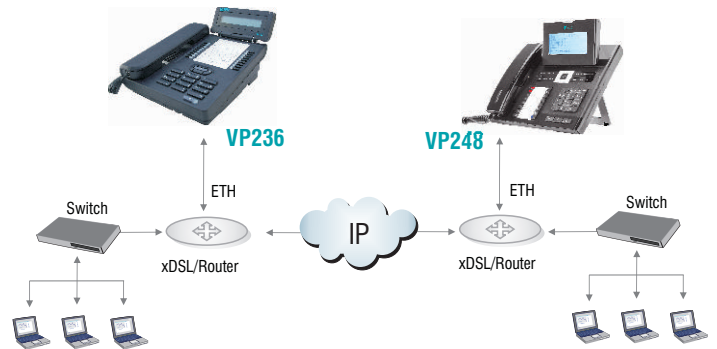

Peer-To-Peer Calling Using SETU VP

KEY FEATURES

3-Party Conference

This unique feature supports 3-party conference without affecting the speech levels. The user can also toggle between two remote parties or connect them and withdraw himself from the conference.

Adjustable LCD Display

The SETU VP's LCD display angle can be adjusted as per the user's convenience. The LCD's brightness and contrast can also be adjusted to improve readability.

Anonymous Call Rejection

SETU VP facilitates the user to reject incoming calls that do not have a Name or Number. Such calls are treated as unknown calls, which the user would not like to receive.

Auto Answer

SETU VP allows answering of the call without the user's intervention, on expiry of auto answer timer which is programmed. If any incoming call is received, SETU VP simulates the off-hook condition by activating the headset to answer the call automatically.

Auto Call Back

When the dialed number is busy, the user can apply the Auto Call Back feature so that his call gets in queue. When the called number is free, the user gets a call back notification on the LCD or LED. This helpful feature spares the user the effort of repeatedly dialing the same number, if it is supported by ITSP or IP-PBX.

Auto Configuration

SETU VP can be configured automatically from a central location. The configuration details like Registrar Server Address, Authentication User ID and User Password are stored in the central server. When the user connects SETU VP to the network, it automatically downloads its configuration using TFTP. This plug-n-play feature requires the user to enter only the server address provided by the service provider.

Black Listed Callers' list

SETU VP allows the blocking of all incoming calls from specific addresses on SIP accounts, thus shielding users from unwanted junk calls.

Call Appearances

This intelligent feature gives the user a notification about 4 calls. While the user is attending a second call by putting the first call on hold, if more incoming calls land on the user's station, SETU VP gives indication for the third and the fourth call as a call waiting. The user can attend these calls by terminating any of the previous active calls or putting the previous call on hold.

Call Forward

Matrix SETU VP provides the user flexibility to forward his calls to a desired destination number. The calls can be forwarded in conditions like All Call, When Busy or When No Reply. The user can forward the calls on one number during the When Busy condition and to another number during a No Reply condition.

Call Hold

Matrix SETU VP allows the user to put the active call on hold and retrieve the second call which is in queue. The user can retrieve the first call again during the second call or on completion of second call. SETU VP notifies the user by indicating the call which is kept on hold.

Call Log

SETU VP is capable of keeping the log of 100 calls in its internal memory. 20 calls each of Dialed Calls, Answered Calls, Unanswered Calls, Rejected Calls and Forwarded Calls with details like Call Number, Called Party Name, Call Day-Date-Time and Call Duration are stored in SETU VP.

Call Mute

SETU VP allows the user to set a one-way speech and to avoid transmission of speech packets to the remote party.

Call Progress Tones and Rings

SETU VP provides Call Progress Tones like Dial Tone, Ring Back Tone and Busy Tone. Country-specific tones can be selected to match the tones of the country where it is installed. Similarly, ring cadences can also be selected.

Call Toggle

The user can handle up to four calls simultaneously, switching over from one active call to another held.

Call Transfer

The SETU VP allows the user to transfer the call after or without talking to a remote party to whom the call is being transferred. SETU VP supports two types of call transfers namely Unattended (Blind) Transfer and Attended Transfer.

Call Waiting

This feature notifies the SETU VP user about another incoming call during an active call.

Calling Options

Matrix SETU VP incorporates advanced calling functionality. The various options provided for making calls are - Using Handset, Using Speakerphone, Using Headset and Hot Pad Dialing. During an active call, the user can switch between handset, headset and speaker mode.

CLIP

CLIP based on information received from SIP message is supported by SETU VP.

CLIR

SETU VP offers the facility of calling line identity restriction. Selected users can deny disclosure of their identity to others.

Compact and Sturdy

Matrix SETU VP is an integrated IP Phone which can be installed on a wall or any table surface.

Day Light Saving

SETU VP synchronizes with the NTP server's clock timing to move forward or backward as per duration set in the system, automatically in tune with the Day Light Saving requirement of the country where it is installed. The options like Week-Day-Month or Date-Month are provided to move the clock forward and backward automatically on the specified day, date and time.

Dial Plan

SETU VP provides a list of 10 programmable numbers or part numbers with economical SIP account. When a user dials a number, it gets the matching entry from the list using "best-fit" logic and uses the SIP account given therein. This ensures lowest cost for all the outgoing calls.

Do Not Disturb Number List

This feature allows the user to receive calls from specific numbers only. Thus Matrix SETU VP provides the user privacy, shielding him from unwanted calls.

Hotline

If a particular number is dialed frequently, it can be programmed as a hotline number. SETU VP waits for some time for the user to dial a number, if the user does not dial any number, SETU VP dials out the hotline number automatically. Option is also provided to set SETU VP to dial the number immediately without waiting for the user to dial the number.

Key Assignment

SETU VP allows the user to assign certain features to be accessed by the touch of a single key. The user can use specific feature by pressing the keys assigned to them. Multiple keys are provided to be programmed for a specific feature that is to be performed by them.

Keypad Lock

SETU VP can be prevented from unauthorized use by locking the keypad. The options for keypad lock are (i) Manual Locking and (ii) Auto Locking. The user password is required to unlock the keypad in both cases.

Least Cost Routing

The SETU VP selects a port that offers the least cost for an outgoing call. It supports dialed number (Dial Plan) based LCR algorithm to select the most cost-effective route for making the call.

MAC Cloning

When replacing the existing hardware with another, you can simplify the installation process by copying the MAC address of your existing PC. In such a case, you do not need to delay the setup process by informing your service provider for newly installed equipment.

Network Port Parameters

Considering various network conditions and application usage, SETU VP provides flexibility to program network parameters as per the requirement. Parameters like PPPoE, IP Address, DHCP, STUN, NAT, DNS, Gateway and Router's Public IP can be programmed through Web Jeeves or Phone.

Notifications

SETU VP has the facility to provide an indication to the user about specific operation or event occurred. In the event of a Call Transfer, Voice Mail, Call Forward and Auto Call Back, SETU VP displays the status on LCD Display. Also the notification for Voice Mail and Auto Call Back is provided by LED.

Password

The configuration of SETU VP is user specific and allows itself to be programmed by the user by providing two passwords: configuration password and user password. The configuration password is used for programming the SETU VP and the user password is used for unlocking the keypad.

Peer-to-Peer Calling

SETU VP can make and receive calls from other VoIP users without any Registrar or Proxy servers. Numbers and IP addresses can be assigned to other VoIP users to provide direct access across the network. SETU VP provides two dialing options for Peer-to-Peer calling: (i) Peer-to-Peer Number Dialing (ii) IP Address Dialing. Organizations having multiple locations like branch offices and factories can use this feature to provide direct dialing between these end-points.

Phone Book

Frequently used numbers with names can be programmed in the internal phone book with 100 entries. On using "Search Contact" functionality, SETU VP displays the entire phone book by names in alphabetical order on the LCD screen. The user can select the desired number and dial out the same.

PPPoE

SETU VP supports PPPoE client and hence can be used with xDSL modems.

Quality of Service (QoS)

QoS is the method of prioritization of voice packets over IP network. Matrix SETU VP supports TOS and DiffServe to facilitate improved voice quality.

SIP Accounts

Two SIP accounts can be programmed and outgoing calls can be routed to SIP accounts based on LCR, Dial Plan or Manual Selection by the user. Dynamic allocation of SIP account is also possible by using a dial plan.

STUN

This capability allows Matrix SETU VP to work behind asymmetrical NAT.

Speed Dial

SETU VP facilitates the user to dial a number at the touch of a single key instead of dialing the entire number. Multiple numbers can be programmed as Speed Dial Numbers and each number can be assigned a specific key. When the user presses the speed dial key, the number is displayed on the LCD screen and then it will be dialed out.

Voice Mail

SETU VP can retrieve voice mail messages at the touch of a single key from the VMS server located at ITSP or IP-PBX. SETU VP notifies the user about new messages in the mailbox in the form of LED and text prompt (VM) on the LCD display.

Volume Setting

Matrix SETU VP allows the user to set receive and transmit gain to improve the quality of speech. The Speaker Volume, Handset Volume, Headset Volume and Ringer Volume, can be adjusted for better audio quality.

V-LAN Tagging

A Virtual Local Area Network (VLAN) may be defined as a group of LANs that have different physical connections, but which communicate as if they are connected on a single network segment. VLANs increase overall network performance by grouping users and resources that communicate most frequently with each other.

Web Jeeves

Matrix SETU VP incorporates built-in HTTP server and web pages for configuration parameters. This web based programming feature helps the user to configure SETU VP from any part of the world once it is connected with the IP network.



FEATURES

Software Features

- 100 Rel/PRACK (RFC 3262)
- 3-Party Conference
- 4-Call Appearance (VP248PE)
- Anonymous Call Rejection
- Auto Answer
- Auto Call Back
- Auto Configuration
- Black Listed Callers' List
- Call Appearances
- Call Log
- Call Mute
- Call Progress Tones and Rings
- Call Toggle
- Calling Options
- CLIP
- CLIR
- Comfort Noise Generation
- Compact and Sturdy
- Day Light Saving
- DHCP Client
- Dial Plan
- DND List
- Do Not Disturb (DND)
- Echo Cancellation
- Forward Error Correction (FEC)
- Hotline
- Key Assignment
- Keypad Lock
- Least Cost Routing
- LED Indications
- MAC Cloning
- Multiple Gateway
- Notifications
- Password Protection
- Peer-to-Peer Calling
- Phone Book
- PPPoE
- Quality of Service (QoS)

- Receiving a Call
- (Handset, Headset, Speaker)
- Rejecting a Call
- Remote Programming
- Search Contact
- Selective SIP line
- SIP Accounts
- SIP Over TCP
- Speed Dial
- STUN
- Symmetric RTP
- Supplementary Services
 - Call Forward On Busy
 - Call Forward On No Reply
 - Call Hold
 - Call Waiting
 - Call Transfer-Blind
 - Call Transfer-Attended
 - Conference 3 Party
 - Making Second Call
- VLAN Tagging
- Voice Activity Detection
- Voice Mail
- Volume Setting
- Web Jeeves

Hardware Features

- 1 LAN Port for Switch,
- Router or xDSL Modem Connectivity
- 1 PC (LAN) Port for PC Connectivity
- 1 Speaker Key
- Programmable Keys
- 5 Navigation Keys
- Full Duplex Speaker Phone
- Head set interface
- Ringer LED
- Swivel Backlit LCD display
- Touch Sense Keys

TECHNICAL SPECIFICATIONS

VoIP	
VoIP Protocols	: SIP v2, SDP, RTP, RFC 2833
Network Protocol	: IPv4, TCP, UDP, DHCP, SNTP, STUN, HTTP, PPPoE
SIP	: 2 SIP Accounts, Out Bound Proxy Support
NAT	: STUN and NAT Keep Alive
Voice Codecs	: G.711 A-Law, m-Law, G.7222, G.723-5.3, G.723-6.3, G.726-16, G.726-24, G.726-32, G.726-40 G.729AB
Call Progress Tones	: Dial Tone, Ring Back Tone, Busy Tone, Error Tone, Waiting Tone
Voice	: Dynamic Jitter Buffer (Adaptive), Comfort Noise Generation and Voice Activity Detection
Quality of Service Data Network	: Layer 3 DIFF Serv and TOS
Security	: LAN Port (RJ45), 10/100 Base T with and without PoE, PC Port (RJ45), 10/100 Base T
Power Supply	: Password Protected Configuration
Input	: 5VDC @2A through External Adaptor (90-265VAC, 47-63Hz) and Power-on-Ethernet (PoE)
Power Consumption	: 5W (Typical)
Connector	: DC Power Jack
Mechanical	
Dimensions (WxHxD)	: VP236: 19.0x8.5x 22.5cm (7.5"x 3.3"x8.9") VP248SE: 24.0x20.0x9.9 cm (9.4"x7.9"x3.9") VP248PE: 24.0x23.0x9.9 cm (9.4"x9.1"x3.9")
Unit Weight	: VP236: 0.80 Kgs (1.7lbs) Approx. VP248: 1.18 Kgs (2.6 lbs) Approx.
Shipping Weight	: VP236: 1.25 Kgs (2.7lbs) Approx. VP248: 1 Kgs (4.6lbs) Approx.
Material	: VP236/VP248: ABS Plastic HB Grade
Installation Mounting	: VP236/VP248: Wall Mount and Table-Top (20 Degree and 45 Degree)
Environmental	
Operating Temperature	: -10 °C to + 50 °C (14 °F to + 122 °F)
Storage Temperature	: -40 °C to + 85 °C (-40 °F to + 185 °F)
Operating Humidity	: 5-95% RH (Non-Condensing)
Storage Humidity	: 0-95% RH (Non-Condensing) at 40 °C



COMPLIANCES

EMI/EMC

Conducted Emission	: CISPR 22 Class A
Radiated Emission	: CISPR 22 Class A
Harmonic Current Emission	: IEC 61000-3-2
Voltage Flicker	: IEC 61000-3-3
Electro-static Discharge	: IEC 61000-4-2
Radiated Susceptibility	: IEC 61000-4-3
Electrical Fast Transient	: IEC 61000-4-4
Surge	: IEC 61000-4-5
Conducted Immunity	: IEC 61000-4-6
Power Frequency Magnetic Field	: IEC 61000-4-8
Voltage Interruption & Dips	: IEC 61000-4-11

FCC

Conducted Emission	: FCC Part 15 Sub Part B Class A
Radiated Emission	: FCC Part 15 Sub Part B Class A

EC Directives

R&TTE 1999/5/EC

LVD 73/23/EEC


EMC 89/336EEC

Safety

IEC 60950-1	: 2001 First Edition
-------------	----------------------

VoIP PRODUCTS FROM MATRIX

ETERNITY IP-PBX	The IP-PBX with Universal Connectivity and Seamless Mobility
SAPEX	All-in-One Embedded IP-PBX Server
VYOM CCX	High-Density SIP Gateway
SETU VGFX	Multi-port SIP based VoIP to GSM-FXO-FXS Gateway
SETU VFXTH	Multi-Port VoIP to FXO-FXS Gateway
SETU VFX	SIP based VoIP Gateway with 4/8 FXS Ports, 1 FXO (PSTN Pass-Through) and 1 Ethernet Port
SETU ATA211G	SIP based Port VoIP to GSM and FXS Gateway
SETU ATA211	SIP based Analog Telephone Adaptor with 1 FXO, 1 FXS Port and 2 Ethernet Ports
SETU ATA2S	SIP based Analog Telephone Adaptor with 2 FXS Ports and 1 Ethernet Port
SETU ATA1S	SIP based Analog Telephone Adaptor with 1 FXS Port and 2 Ethernet Ports
SETU VP248PE	Executive IP-Phone with 6 Lines x 24 Characters LCD Display and PoE
SETU VP248SE	Executive IP-Phone with 2 Lines x 24 Characters LCD Display and PoE
SETU VP236SE	Executive IP-Phone with 2 Lines x 24 Characters LCD Display and PoE
SETU VP236S	Executive IP-Phone with 2 Lines x 24 Characters LCD Display



ABOUT MATRIX

An ISO 9001 Company, Matrix is a leader in Telecom and Security solutions for modern businesses and enterprises. An innovative, technology driven and customer focused organization; the company is committed to keep pace with the revolutions in the telecom and security industries. With around 30% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge telecom products like IP-PBX, Universal Gateways, VoIP Gateways and Terminals, GSM Gateways, Access Control and Time-Attendance Systems and Fire Alarm Systems. These solutions are feature-rich, reliable and conform to the international standards. Having global foot-prints in Asia, Europe, North America, South America and Africa through an extensive network of more than 500 channel partners, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of more than 150,000 customers representing the entire spectrum of industries. Matrix has won many awards for its innovative products.



For further information contact:



MATRIX COMSEC PVT. LTD.

394-GIDC, Makarpura,
Vadodara-390010, India.

Phone: +91 265 2630555

Fax: +91 265 2636598

Email: Inquiry@MatrixComSec.com

www.MatrixComSec.com

SMS 'MATRIX' to 99987 55555